


Product Range

Thermal fluid heaters

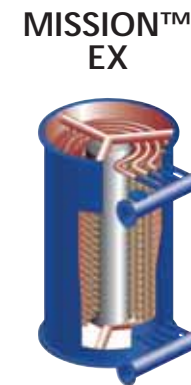

TYPE

Fired
thermal fluid heater

Fired
thermal fluid heater

Exhaust gas
thermal fluid heater

Exhaust gas
thermal fluid heater

EXECUTION

- Cylindrical
- Horizontal

- Cylindrical
- Vertical

- Cylindrical
- Vertical

- Cylindrical
- Vertical

CAPACITY

100 - 20,000 kW

100 - 20,000 kW

100 - 5,000 kW

100 - 5,000 kW

DESIGN PRESSURE

10 / 13 bar (g)

10 / 13 bar (g)

10 / 13 bar (g)

10 / 13 bar (g)

DESIGN TEMPERATURE

280 / 350°C

280 / 350°C

300°C

300°C

BURNER

- Monobloc pressure jet burner
- Rotary cup burner

- Monobloc pressure jet burner
- Rotary cup burner

- Up to 700,000 kg/h exhaust gas flow

- Integrated by-pass damper
- Up to 80,000 kg/h exhaust gas flow




ABBREVIATIONS

MISSION™ TFO
fired heaters

V 4 0 TFO 010

Example: V4-0-TFO-010

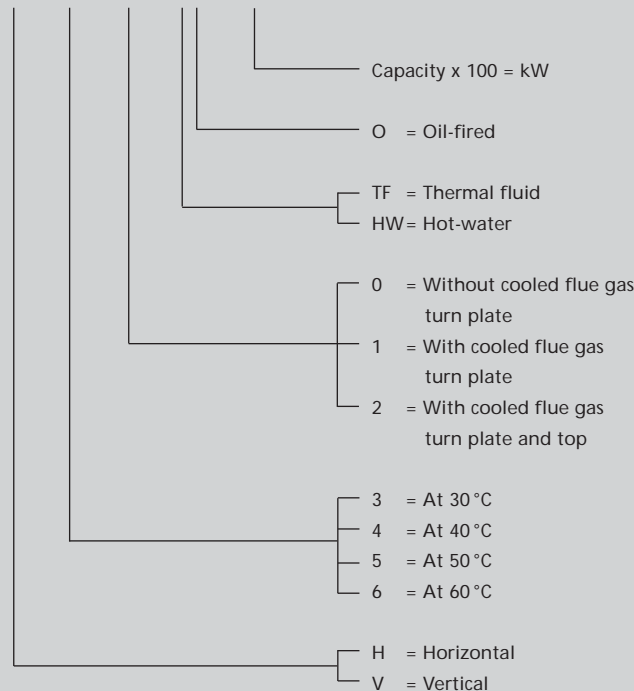


ABBREVIATIONS

MISSION™ EX
economisers

TF EXV 630 42 48.3 600 SD

Example: TF-EXV-630-42.3-600SD

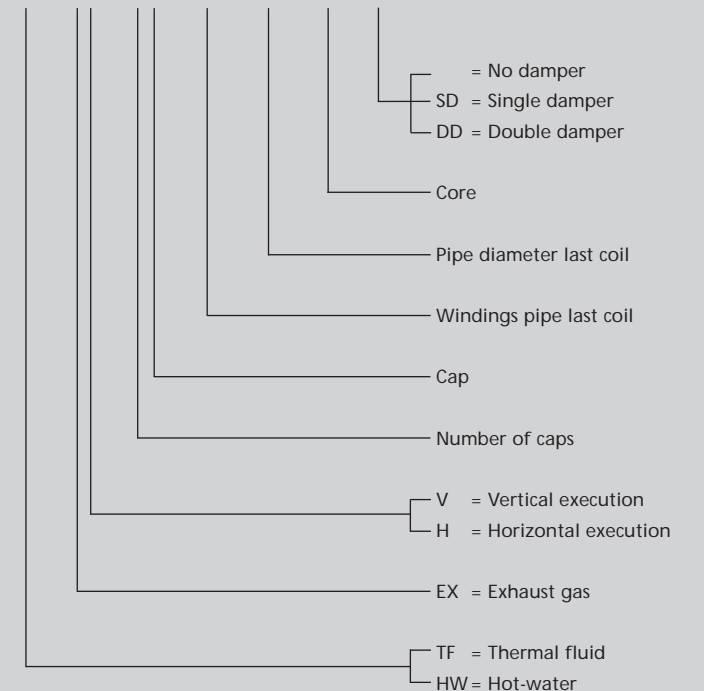

Your thermal fluid heater contact:

Aalborg Industries NL BV
P.O. Box 145
3200 AC Spijkensisse
The Netherlands
Tel.: +31 181 650 500
Fax: +31 181 650 501
E-mail: rtmw@aalborg-industries.nl
<http://www.aalborg-industries.com>